

DHI-ARK30T-W2(868)

Wireless Keypad



- Supports 3 shortcut alarms: Medical, fire, emergency.
- Arm/Disarm with password or IC card.
- Supports signal strength detection to select suitable installation sites.
- Low battery alarm.
- Temperature monitoring.
- Frequency hopping function and two-way communication.
- Cloud update and automatic recovery from update failure.

System Overview

Wireless Keypad is used with Alarm Hub, and supports multiple users, allowing each one to access the alarm security system with their own private passcode. The system also conveniently keeps a log of the operations performed by each user, making it easy to review and analyze usage history.

Scene

Ideal for use in villas, shops, apartments and more.

Technical Specification

Function

| | |
|-------------------------------|--|
| Indicator Light | 4 indicators (communication, arm/disarm, fault, and alarm) |
| Button | 15 buttons (0–9, *, #, arm, disarm, and home arm) |
| Buzzer | 1 × built-in buzzer |
| Arm and Disarm | Password; IC card |
| Remote Update | Cloud update |
| Low Battery Detection | Yes |
| Tamper | Yes |
| Measuring Range (Temperature) | –15 °C to +65 °C (+5 °F to +149 °F) (indoor) |
| Measuring Accuracy | 1 °C (33.8 °F) |
| User Management | 32 users |

Wireless

| | |
|-------------------------|--|
| Carrier Frequency | 868.0 MHz–868.6 MHz |
| Communication Mechanism | Two-way |
| Communication Distance | Up to 1,600 m (5,249.34 ft) in an open space |
| Encryption Mode | AES128 |

| | |
|-------------------|-----|
| Frequency Hopping | Yes |
|-------------------|-----|


General

| | |
|-----------------------|--|
| Power Supply | 4 × AA batteries |
| Battery Life | 3 years (if the device is used to arm and disarm once a day). After enabling Entering/Exiting Delay Time and Arming/Disarming Ringtone function: 2 years (if the devices is used to arm and disarm once day). |
| Power Consumption | Max. 2.3 W |
| Operating Temperature | –10 °C to +55 °C (+14 °F to +131 °F) (indoor) |
| Operating Humidity | 10%–90% (RH) |
| Product Dimensions | 146.0 mm × 82.0 mm × 22.6 mm (5.75" × 3.23" × 0.89") |
| Packaging Dimensions | 180.0 mm × 104.0 mm × 58.0 mm (7.07" × 4.09" × 2.28") |
| Net Weight | 240 g (0.529 lb) (with battery) 145 g (0.32 lb) (without battery) |
| Gross Weight | 370 g (0.816 lb) |
| Installation | Wall mount |
| Casing Material | PC + ABS |
| Certifications | CE EN 50131-1:2006+A1:2009+A2:2017+A3:2020 EN 50131-3:2009 EN 50131-6:2017 EN 50131-5-3:2017 Security Grade 2 Environmental Class II |

Ordering Information

| Type | Part Number | Description |
|--------|--------------------|-----------------|
| Keypad | DHI-ARK30T-W2(868) | Wireless Keypad |

Installation

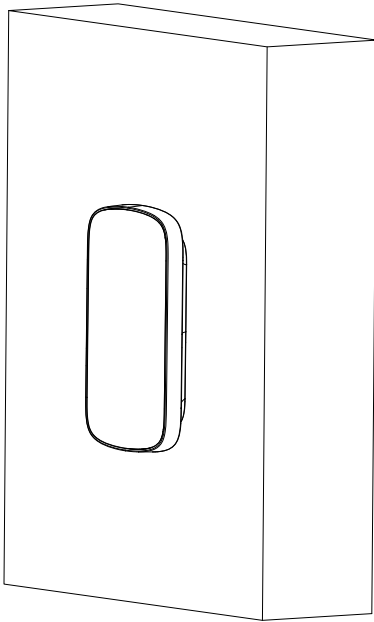

Application



Alarm Hub



RF868



Wireless Keypad

Dimensions (mm[inch])

