

DHI-ITC431-SU1F-F

Dahua 4MP Smart Vehicle Detector



- 1.8" CMOS image sensor with a resolution of 2688 × 1520.
- Adopts advanced image processing technology that makes it ideal for use in areas that are dark or have poor lighting.
- Monitors road events throughout the day and detects up to 128 vehicles at the same time.
- Supports up to 256 GB TF cards.
- Supports H.265, H.264M, H.264H and MJPEG for video compression.
- IP66 rated.

System Overview

Dahua 4MP Smart Vehicle Detector is designed with a high-frequency millimeter wave radar and high-performance AI processor. With its deep learning algorithms, it seamlessly combines radar and video data, collects vehicle metadata in real time, and generates traffic flow statistics. It also provides event detection and traffic warnings to increase road safety.

Functions

Traffic Statistics

Generates traffic flow statistics by lane, the statistics include vehicle flow, average speed, space headway, time headway, time occupancy rate, space occupancy rate, queue length, traffic status, and vehicle type.

All-Weather Detection and Recognition

Radar and video data are both integrated for detection and recognition, allowing the camera to identify and locate objects with the radar when video detection fails. The camera works in rain, snow, fog and at night, performing high-precision detection and recognition regardless of the weather.

Intelligent Recognition

Supports recognizing plate numbers and colors, and vehicle colors and types.

Multi-dimensional Perception

By integrating the camera with the high-precision millimeter wave radar, the device uses deep learning technology to manipulate high-frequency bands, and collect and integrate different types of data such as data from structures and scenes. This makes it suitable for a wide variety of locations.

Wide Monitoring Range

Highly intuitive, it tracks up to 128 targets, and can detect motor vehicles that are 250 meters away.

Scene

It is ideal for use at intersections and road sections, and for event detection.

Technical Specification

Camera

| | |
|------------------------------|---|
| Image Sensor | 1/1.8" CMOS |
| Shutter Mode | Single shutter; Double shutter |
| Electronic Shutter Speed | Auto/Manual 1/50 s~1/100,000 s |
| Exposure Mode | Fully automatic/custom interval automatic/custom |
| Iris Control | Fixed |
| Image Resolution | 2688 × 1520 (OSD black background is not calculated in the pixels) |
| Video Resolution | 4M (2688 × 1520); 1080p (1920 × 1080); UXGA (1600 × 1200); 720p (1280 × 720); D1 (704 × 576); CIF (352 × 288) |
| Video Frame Rate | PAL: main stream (2688 × 1520@ 25 fps), sub stream (1600 × 1200@ 25 fps) NTSC: main stream (2688 × 1520@ 30 fps), sub stream (1600 × 1200@ 30 fps) |
| Video Bit Rate | H.264: 32 kbps~32768 kbps H.265: 32 kbps~32768 kbps MJPEG: 512 kbps~32768 kbps |
| Video Compression | H.264H;H.264B;H.265;MJPEG;H.264M |
| Field of View | H: 37.24°; V: 20.75°; D: 42.96° |
| Image Encoding Format | JPEG |
| Min. Illumination | 0.001 lux |
| WDR | 120 dB |
| White Balance | Auto;Night;Area white balance |
| Noise Reduction | 3D NR |
| HLC | Yes |
| Bad Pixel Correction | Yes |
| Edge Enhancement | Yes |
| Expansion Module | Built in 80G millimeter wave radar, supporting long-distance traffic flow collection |
| Radar Transmission Frequency | 80 GHz |
| Radar Antenna Beamwidth | Horizontal: -15 °~15 °, vertical: -4.5 °~4.5 ° |
| Speed Measurement Range | 1 km/h~250 km/h |
| Speed Measurement Accuracy | ±5 km/h |
| Detection Region | 250 m |
| Measurement Error | ±0.6 m |

Function

| | |
|-----------------|---|
| Composite Image | Supports composing 1, 2, 3, or 4 images |
| Trigger Mode | Video detection; radar |
| OSD Overlay | Time; address; lane No.; license plate; vehicle speed; vehicle color (not supported under infrared); vehicle logo; vehicle type |
| Storage | FTP;TF |

| | |
|---------------------------------------|---|
| Alarm Event | Storage full; storage error; no storage card; abnormal attitude; illegal access; license plate blocklist; security exception; traffic congestion; illegal parking; wrong-way driving; pedestrian event; excessive speeding; not keeping a safe distance from the vehicle ahead; road security warning |
| Automatic Network Replenishment (ANR) | Platform and FTP (TF card is required) |
| Image Tampering Prevention | Watermark and verification are available for videos and images |
| Positioning | GPS |
| Network Status Monitoring | NTP; GPS |
| Attitude Detection | Built in electronic gyroscope, supporting detection of abnormal posture and alarm |
| Security | Authorized username and password, MAC address binding, HTTPS encryption, and network access control |
| Auto Registration | Yes |

Intelligence

| | |
|---------------------------|---|
| Target Detection | Supports up to 128 object detections |
| ANPR | Bengal region recognition algorithm (Recognition algorithm for other regions can be customized) |
| Vehicle Type Recognition | Vehicle head: Large bus, heavy truck, medium truck, sedan, van, light truck, medium bus, SUV, MPV, and pickup Vehicle tail: SUV, large bus, sedan, light truck, pickup, medium truck, van, and heavy truck |
| Vehicle Color Recognition | White, pink, black, red, yellow, gray, blue, green, dark orange, purple, brown, and silver gray |
| Traffic Flow Detection | Statistics of vehicle flow, average speed, lane occupancy, average time headway, average queue length, road status, and more; statistics can be exported in excel |
| Traffic Event | Records videos, take snapshots and triggers alarms for various events such as wrong-way driving, pedestrian violation, traffic congestion, speeding, driving too slow, not keeping a safe distance from the vehicle ahead, Traffic Road Alert and road security warnings. |
| Lens Mount | M16 |

Port

| | |
|--------------|--|
| Network Port | 2 × RJ-45 Ethernet ports, 10/100/1000 M network transmission |
| GPS | 1,GPS |
| Storage | 1,Maximum support for 256G TF card local storage |
| RS-485 | 2, connects to continuous lights and more |
| RS-232 | 1, for serial port debugging |
| I/O | 1, for I/O alarm output |
| Power Supply | 12 VDC, 24 VAC, 36 VDC |


General

| | |
|-----------------------|--------------------------------------|
| Power Consumption | ≤ 20 W |
| Operating Temperature | -40 °C to +65 °C (-40 °F to +149 °F) |
| Storage Temperature | -40 °C to +70 °C (-40 °F to +154 °F) |

Smart Vehicle Detector | DHI-ITC431-SU1F-F

| | |
|----------------------|--|
| Operating Humidity | 10%–90% (RH), non-condensing |
| Storage Humidity | 10%–90% (RH), non-condensing |
| Protection | IP66 |
| Anti-corrosion Level | Basic Protection |
| Product Dimensions | 201.7 mm × 148 mm × 440.5 mm (7.94" × 5.83" × 17.34") (L × W × H) |
| Net Weight | 3.4 kg (7.50 lb) |
| Gross Weight | 5.4 kg (11.90 lb) |
| Certifications | CE |
| Installation | Column bracket mount |
| Power Adapter | 36 VDC (included) |
| Lens | 12 mm |
| Focal Length | 12 mm |
| Lens Type | Fixed-focal |

Dimensions (mm [inch])

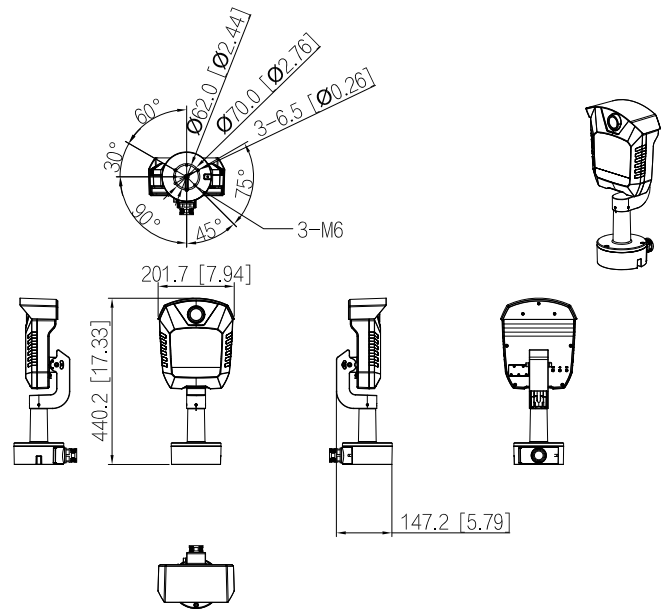

Ordering Information

| Type | Model | Description |
|------------------------|-------------------|---|
| 4 MP Camera | DHI-ITC431-SU1F-F | 4MP Smart Vehicle Detector |
| Accessories (Optional) | PFA150 | Mounting bracket (purchase separately) |
| | ARD16 | Side Mounting Bracket (purchase separately) |

Accessories

Optional:



PFA150
Mounting bracket
(purchase separately)

