

# DHI-NVR5832-I/L

# 32 Channel 2U 8HDDs WizMind Network Video Recorder



Launched by Dahua Technology, Dahua WizMind is a full portfolio of solutions composed of project-oriented products including IPC, NVR, PTZ, XVR, Thermal and software platform which adopts industry-leading deep learning algorithms. Focusing on customer's requirements, WizMind provides precise, reliable and comprehensive AI solutions for verticals.

#### Overview

Dahua new NVR5000-I/L network video recorder delivers excellent performance and high recording quality that is ideally suitable for IP video surveillance applications. This NVR adopts powerful processor, providing the capability of 4K resolution processing for applications where image details are highly required. Additionally, the NVR can be served as edge storage, central storage or backup storage with an intuitive shortcut operation menu for remote management and control.

With build-in deep learning module, NVR5000-I/L series products adopt video image structuring technology based on deep learning algorithms, achieving high-precision human face recognition and perimeter protection. By applying deep learning artificial intelligence, NVR5000-I/L allows users to focus on what matters most, improves event response time and helps make video actionable.

The NVR is compatible with numerous third-party devices, which make it the perfect solution for surveillance systems that work independently of video management system (VMS).

#### **Functions**

#### **Perimeter Protection**

Automatically filtering out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improving alarm accuracy.

# Face Recognition

Dahua Face Recognition technology extracts the features of captured faces and compares them with that in face database to recognize the person identity.

- · Smart H.265+/H.265/Smart H.264+/H.264/MJPEG
- · Up to 4 Channel video metadata
- Up to 12 Channel perimeter protection, SMD Plus
- Up to 4 Channel video stream face recognition
- Up to 16 face pictures/sec processing
- Up to 20 face databases with 200,000 face images in total



#### **SMD Plus**

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

#### Video Metadata

With deep learning algorithm, Dahua Video Metadata technology can detect, track, capture vehicle, non-motor vehicle and people, and select the best images, and extract attributes.

### **ANPR by Camera**

With deep learning algorithm, Dahua ANPR technology can recognize the number plate information of vehicles in the image with ANPR cameras. Support block/allowlist mode, searching target vehicles from recorded video.

#### **People Counting by Camera**

With deep learning algorithm, Dahua People Counting technology can track and process moving human body targets to realize the accurate statistics of enter No., leave No., and In Area No. Working with management platform, it outputs yearly/monthly/weekly/daily reports to meet your requirements.

#### Stereo Analysis by Camera

With deep learning algorithm and scene 3-dimensional information, Dahua Stereo Analysis technology can recognize people's behaviors, such as fall detection, violence detection, strand detection, and space exception, and then generates alarm signals and triggers linkage.


| Technical Specification |  | Resolution           | 24MP, 16MP, 12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P,   |  |
|-------------------------|--|----------------------|---|--|
| System                  |  | Record Mode          | 1.3MP, 720P, D1 etc.  Manual, Schedule (Continuous, MD (Motion Detection),  |  |
| Main Processor          | Multi-core embedded processor  |                      | Alarm, IVS)  1–120 min (default: 60 min), Pre-record: 1–30 sec, Post-   |  |
| Operating System        | Embedded LINUX   | Record Interval      | record: 10–300 sec  |  |
| Perimeter Protection    |  | Raid Support         | Raid0,Raid1,Raid5,Raid10  |  |
| Performance             | 12 channel, 10 IVS rules for each channel  | Video Detection and  |   |  |
| Object classification   | Human/Vehicle secondary recognition for tripwire and intrusion   | Trigger Events       | Alarm Out, Video Push, Email, Recording, PTZ, Tour,<br>Snapshot, Voice Prompt, Buzzer and Screen Tips   |  |
| Al Search               | Search by target classification (Human, Vehicle)   | Video Detection      | Motion Detection, MD Zones: 396 (22 $\times$ 18), Video Loss, Tampering and Scene Change  |  |
| Face Recognition        |  | Alarm input          | 16 Channel  |  |
|                         | Max 16 face pictures/sec processing (modeling and comparing)   | Relay Output         | 6 Channel   |  |
| Performance             | 4 channel video stream face recognition/16 channel   | Playback and Backup  | Playback and Backup   |  |
|                         | picture stream face recognition (with FD camera)  Detect strangers' faces (not in device's face database).     | Sync Playback        | 1/4/9/16  |  |
| Stranger Mode           | Similarity threshold can be set manually.  | Search Mode          | Time/Date, Alarm, MD and Exact Search (accurate to second)  |  |
| Al Search               | Up to 8 target face images search at same time, similarity threshold can be set for each target face image.    | Backup Mode          | USB Device/Network  |  |
| Database Management     | Up to 20 face databases with 200,000 face images in total. Name, gender, birthday, nationality, address, ID    | Third-party Support  |   |  |
| Database Application    | information can be added to each face picture.  Each database can be applied to video channels independently.  | Third-party Support  | Panasonic, Sony, Samsung, Axis, Pelco, Arecont, Onvif, Canon and more   |  |
| Trigger Events          | Buzzer, Voice Prompts, Email, Snapshot, Recording,   | Network              |   |  |
|                         | Alarm Out, PTZ Activation, etc.  | Interface            | 2 RJ-45 Ports (10/100/1000 Mbps)  |  |
| Metadata                |  | PoE                  | N/A   |  |
| Face<br>Vehicle         | Gender, age, glasses, beard, mouth mask, expression.  Plate No., type, color, vehicle type, logo, plate color, | Network Protocol     | HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, SNMP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPP0E,DDNS, FTP, Alarm Server, IP Search (Support Dahua IP camera, DVR, NVS, etc.), P2P |  |
|                         | ornament, calling, seatbelt, region.  Top, top color, bottom, bottom color, hat, bag, gender,                  | Max. User Access     | "<br>128 users  |  |
| Human Body              | age, umbrella.   | Mobile App           | iPhone, iPad, Android   |  |
| Non-motor Vehicle       | Type, color, number of passengers, helmet.   | Interoperability     | ONVIF 2.4, SDK, CGI   |  |
| AI Search               | Support search target video by metadata.   | Storage              |   |  |
| Audio and Video         |  |                      | 8 SATA III ports, up to 10 TB for a single HDD. The   |  |
| IP Camera Input         | 32 Channel   | Internal HDD         | maximum HDD capacity varies with environment temperature  |  |
| Two-way Talk            | 1 Channel Input, 1 Channel Output, RCA   | eSATA                | 1 eSATA   |  |
| Display                 |  | Auxiliary Interface  |   |  |
| Interface               | 2 HDMI, 1 VGA  | USB                  | 4 USB Ports (2 Rear USB 3.0, 2 Front USB 2.0)   |  |
| Resolution              | HDMI1/VGA: 1920 × 1080, 1280 × 1024, 1280 × 720  | RS232                | 1 Port, for PC Communication and Keyboard   |  |
|                         | HDMI2: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720   | RS485                | 1 Port, for PTZ Control   |  |
| Decoding Capability     | 4-ch@8MP (30fps), 16-ch@1080P (30fps)  | Electrical           |   |  |
| Multi-screen Display    | 1st Screen: 1/4/8/9/16/25/36   | Power Supply         | Single, AC100V–240V, 50–60 Hz   |  |
| Recording               | 2nd Screen: 1/4/8/9/16   | Power Consumption    | NVR: <16.1W (Without HDD)   |  |
| Bandwidth               | 320 Mbps (160 Mbps when Al function enabled)   | Fan                  | Smart fan, automatically adjust running speed   |  |
| Compression             | Smart H.265+/H.265/Smart H.264+/H.264/MJPEG  | Environmental        |   |  |
| Compression             | Singi (11.2057)11.205/311d1 (11.2047)11.204/WJPEG  | Operating Conditions | -10°C to +55°C (+14°F to +131°F), 86–106kpa   |  |


# Wiz Mind | DHI-NVR5832-I/L

| Storage Conditions | 0°C to +40°C (+32°F to +104°F), 30–85% RH                   |  |  |  |
|--------------------|---|--|--|--|
| Construction       |   |  |  |  |
| Dimensions         | 2U, 439.7 mm × 451.0 mm × 94.9 mm (17.31" × 17.75" × 3.73") |  |  |  |
| Net Weight         | 6.70 kg (14.8 lb) (without HDD)                             |  |  |  |
| Gross Weight       | 9.30 kg (20.5 lb) (without HDD)                             |  |  |  |
| Certifications     |   |  |  |  |
| CE                 | EN55032, EN55024, EN50130-4, EN62368-1                      |  |  |  |
| FCC                | Part 15 Subpart B, ANSI C63.4-2014                          |  |  |  |
|                    |   |  |  |  |


| Ordering Information      |                 |   |  |  |
|---------------------------|-----------------|---|--|--|
| Туре                      | Model           | Description   |  |  |
| 32 Channel<br>WizMind NVR | DHI-NVR5832-I/L | 32 Channel 2U 8HDDs WizMind<br>Network Video Recorder |  |  |

# Dimensions (mm[inch])

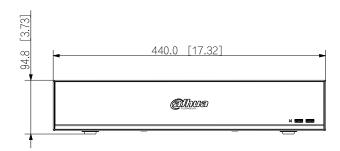

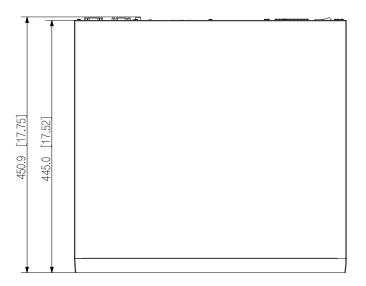

#### **Panels**

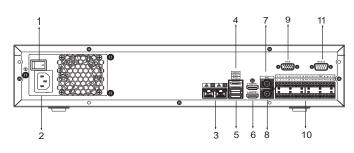

- 1 Power Switch
- 3 Netwrok Ports
- 5 USB Ports
- 7 AUDIO OUT, RCA Connector
- 9 VGA Port
- 11 RS-232 Port

- 2 Power Input
- 4 eSATA Port
- 6 HDMI Ports
- 8 AUDIO IN, RCA Connector
- 10 Alarm In/Out