

DH-PFB5310C In-ceiling Mount Bracket



- The screws are embedded in the frame and the camera neatly installs into its bracket without hindering its visual range.
- \cdot Suitable for 4A recessed ceiling brackets, it is quick and easy to install.
- \cdot Easy to disassemble and maintain.
- · Safe and reliable, it includes an anti-drop rope that provides the camera with added protection.




| Storage Temperature | -40 °C to +60 °C (-40 °F to +140 °F) |
|----------------------|--------------------------------------|
| Storage Humidity | 10%–90% (RH) |
| Anti-corrosion Level | Basic Protection |

Ordering Information

| Туре | Model | Description |
|-----------------|-------------|--------------------------|
| Camera Mount | DH-PFB5310C | In-ceiling Mount Bracket |
| | PFB5310C | In-ceiling Mount Bracket |

Installation

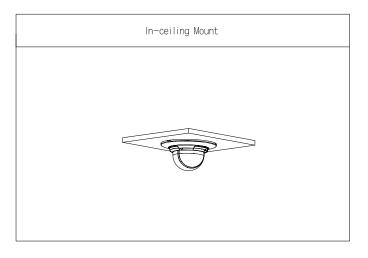

System Overview

Dahua Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.


Scene

Ideal for mounting cameras, and works in temperatures ranging from -40 °C to +60 °C (-40 °F to +140 °F) and in environments with a relative humidity of less than 90%.

Technical Specification

| Structure | |
|-----------------------|--|
| Casing Material | SECC, PC |
| Product Dimensions | Φ238.0 mm × 78.0 mm (Φ9.37" × 3.07") |
| Appearance Color | White |
| Net Weight | 0.35 kg (0.77 lb) |
| Gross Weight | 0.62 kg (1.37 lb) |
| Load Bearing | 3.0 kg (6.61 lb) |
| Installation | In-ceiling Mount |
| Applicable Model | Please see "Camera Accessories Selection" |
| Packaging Dimensions | 286.0 mm × 286.0 mm × 120.0 mm (11.26" × 11.26" × 4.72") (L × W × H) |
| Environment | |
| Operating Temperature | -40 °C to +60 °C (-40 °F to +140 °F) |
| Operating Humidity | < 90% (RH) |

Dimensions (mm[inch])



Package Information

- In-ceiling mount bracket × 1
- M4x10 screw × 4
- Anti-drop rope × 1
- \cdot Installation guide \times 1

Rev 002.000 © 2023 Dahua. All rights reserved. Design and specifications are subject to change without notice. The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product.