

# DH-PFB603C

## Ceiling Mount Bracket



- Aluminum alloy material, cost-effective
- Dedicated for particular cameras, beautiful and elegant designed



### Series overview

Ideal for mounting cameras, it works in temperatures ranging from  $-40^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$  to  $+140^{\circ}\text{F}$ ) and in environments with relative humidity of less than 90%.

### Technical Specification

#### Structure

Material	Aluminum alloy
Dimensions	246.0 mm $\times$ 88.0 mm $\times$ 493.0 mm (9.68" $\times$ 3.46" $\times$ 19.41") (L $\times$ W $\times$ H)
Color	White
Net Weight	0.67 kg (1.48 lb)
Gross Weight	0.88 kg (1.94 lb)
Load Bearing	3.0 kg (6.61 lb)
Installation	Ceiling mount
Rotation Angle	Pan: $0^{\circ}$ to $180^{\circ}$ ; Tilt: $-30^{\circ}$ to $30^{\circ}$
Applicable Camera	Please see "Accessory Selection"
Product Dimensions	215.0 mm $\times$ 95.0 mm $\times$ 520.0 mm (8.46" $\times$ 3.74" $\times$ 20.47") (L $\times$ W $\times$ H)
Packaging Dimensions	450.0 mm $\times$ 490.0 mm $\times$ 520.0 mm (17.71" $\times$ 19.29" $\times$ 20.47") (L $\times$ W $\times$ H)
Packaging Method	10 pcs in each carton


#### Environment

Operating Temperature	$-40^{\circ}\text{C}$ to $+60^{\circ}\text{C}$ ( $-40^{\circ}\text{F}$ to $+140^{\circ}\text{F}$ )
Operating Humidity	< 90% (RH)
Storage Temperature	$-40^{\circ}\text{C}$ to $+60^{\circ}\text{C}$ ( $-40^{\circ}\text{F}$ to $+140^{\circ}\text{F}$ )
Storage Humidity	10%–90% (RH)


### Ordering Information

Type	Model	Description
Camera Mount	DH-PFB603C	Ceiling Mount Bracket

### Installation

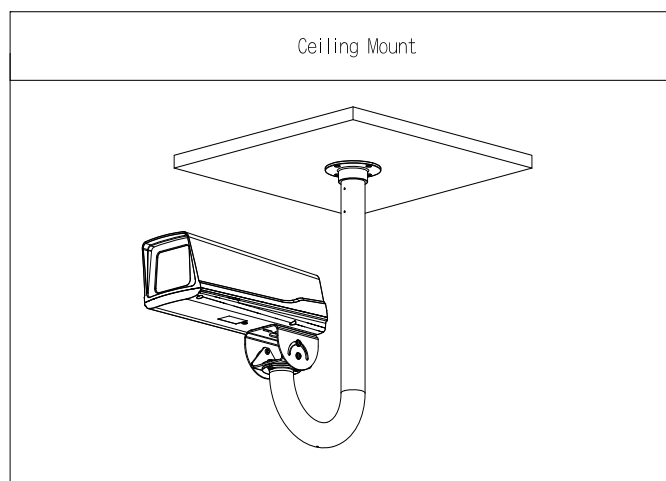

## Dimensions (mm[inch])

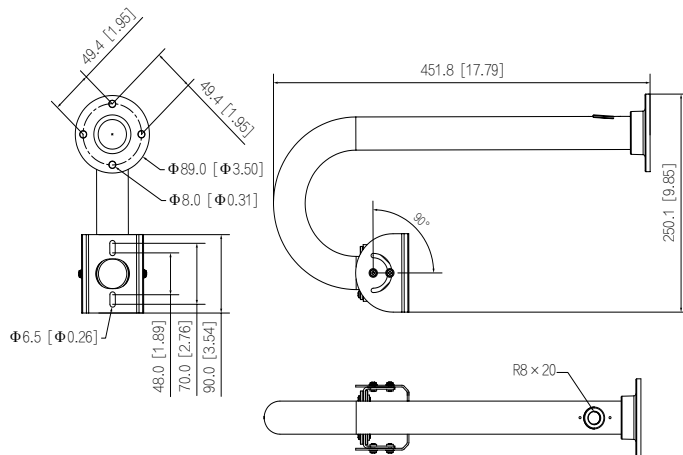

## Package Information

- Ceiling Mount Bracket \*1
- M6 Metal Expansion Bolt \*4
- 1/4-20x8 UNC screws \*2
- M6x10 screws \*2
- S3.0 wrench \*1