

# DHI-LS550UEH-UG

55" FHD Video Wall Display Unit (Ultra Narrow Bezel 0.88mm)



#### Features:

- $\cdot$  Industrial level IPS LCD panel, suitable for continuous 24h/7 operation
- · Ultra-narrow 0.88mm bezel-to-bezel design
- $\cdot$  Anti-glare and high brightness panel, vivid and memorable image quality
- · Factory calibration technology for high color uniformity
- $\cdot$  Built-in 3D noise reduction system and picture splicing function
- $\cdot$  Abundant interfaces HDMI, DVI, VGA, DP (UHD daisy chain), RS232, Audio
- Up to 4K@60Hz signal input by DP IN or HDMI 1 interface, up to 4K@30Hz signal output by DP OUT interface
- $\cdot$  Infrared, RS232 dual mode, supporting remote control by computer
- $\cdot$  Professional thermal design to extend device lifespan
- Built-in power, low energy consumption, ultra-quiet
- · Modular structure design, multiple installation modes
- Widely used in surveillance center, command center, meeting room, commercial display scenes, etc.

Ultra-rarrow	24h*7)	1080p FULL HD	High Brightness	178	<b>4.K</b>	DisplayPort	VESA
--------------	--------	---------------------	-----------------	-----	------------	-------------	------


General				
Power Supply	AC100V~AC240V, 50/60 Hz			
Power Consumption (Standby)	<0.5W			
Power Consumption (Typical)	150W			
Power Consumption (Max.)	205W			
Energy Efficiency Class (EU)	G			
Installation Mode	Floor-standing, wall-mounted			
VESA	600×400mm, M6			
Control Mode	Infrared, RS232 dual mode, supporting remote control by computer			
Net Weight	24.5kg (54.01lb)			
Gross Weight	32kg (70.55lb)			
Product Dimension (W×H×D)	1210.5mm×681.2mm×117.4mm (47.7"×26.8"×4.6")			
Package Dimension (W×H×D)	1360mm×945mm×280mm (53.5"×37.2"×11.0")			
	Temperature	0 °C~+40 °C		
Operating Environment	Humidity	10%RH~90%RH (non- condensing)		

Model		
Model	DHI-LS550UEH-UG	
Display		
Diagonal Size	55"(16:9)	
Panel Type	IPS	
Resolution	1920×1080 (FHD)	
Bezel Width	0.44mm (T/L/B/R)	
Backlight	Direct LED	
Brightness	700 cd/m <sup>2</sup>	
Contrast Ratio	1100:1	
Pixel Density	40dpi	
Viewing Angle	H178°, V178°	
Response Time (G-to-G)	8ms	
Color Depth	10bit (1.07B)	
Color Temperature	10,000K	
Surface Treatment	Haze 28%, 3H	
MTBF	50,000h	
Signals		
Input	VGA(D-Sub)×1, DVI-D×1, HDMI×2, DP×1, RS232×1, Audio×1, IR×1	
Output	DP×1, RS232×1, Audio×1	

## Technical Specification

### Ultra Series | DHI-LS550UEH-UG

### Dimensions(mm)

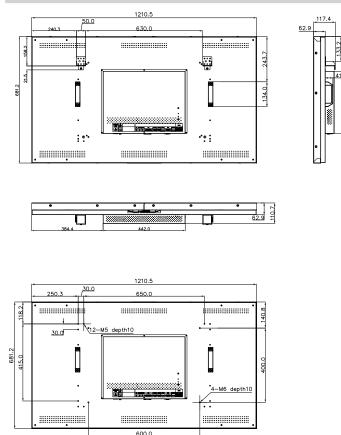

Remove The Hook

Rev 002.000 © 2022 Dahua. All rights reserved. Design and specifications are subject to change without notice. The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product.