

VTH5241DW

Wi-Fi Indoor Monitor



Technical Specification

| | |
|-------|-----------|
| Model | VTH5241DW |
|-------|-----------|

System

| | |
|----------------|--------------------------|
| Main Processor | Embedded Micro Processor |
|----------------|--------------------------|

| | |
|------------------|-------------------|
| Operation System | Embedded LINUX OS |
|------------------|-------------------|

Video

| | |
|-------------------|-------|
| Video Compression | H.264 |
|-------------------|-------|

Audio

| | |
|-------------------|-------|
| Audio Compression | G.711 |
|-------------------|-------|

| | |
|-------------|--------------------------|
| Audio Input | All-direction Microphone |
|-------------|--------------------------|

| | |
|--------------|----------------------|
| Audio Output | Built-in Loudspeaker |
|--------------|----------------------|

| | |
|--------------------|-------------------------------------|
| Bidirectional Talk | Support Dual-way Bidirectional talk |
|--------------------|-------------------------------------|

Display

| | |
|------------|--------------------------|
| LCD Screen | 10" 1024x600, Capacitive |
|------------|--------------------------|

Operation Mode

| | |
|-------|---------------|
| Input | Touch buttons |
|-------|---------------|

Interface

| | |
|-------------|------------------|
| Wired Zones | 6 on-board zones |
|-------------|------------------|

| | |
|----------------|------------------|
| Wireless Zones | 6 wireless zones |
|----------------|------------------|

| | |
|-----------|---|
| Alarm Out | 1 |
|-----------|---|

| | |
|-------|---|
| RS485 | 1 |
|-------|---|

Network

| | |
|-------|-----------------|
| Wi-Fi | IEEE802.11b/g/n |
|-------|-----------------|

| | |
|----------|---------------------------|
| Ethernet | 10M/100Mbps Self-adaptive |
|----------|---------------------------|

| | |
|------------------|--------|
| Network Protocol | TCP/IP |
|------------------|--------|

Features


- 10" TFT Capacitive touch screen, 1024x600
- IPC surveillance
- 6ch wired alarm integration, 6ch wireless alarm integration(433MHZ)
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)




General

| | |
|---------------------|------------------------|
| Memory Slot | Micro SD, Max 32GB |
| Installation | Surface |
| Power | DC 12V, PoE (802.3af) |
| Power Consumption | Standby ≤1W, Work ≤8W |
| Working Temperature | -10°C~+55°C |
| Relative Humidity | 10%~90%RH |
| Dimensions | 265.0mm×180.0mm×22.0mm |
| Weight | 1Kg |

Dimensions

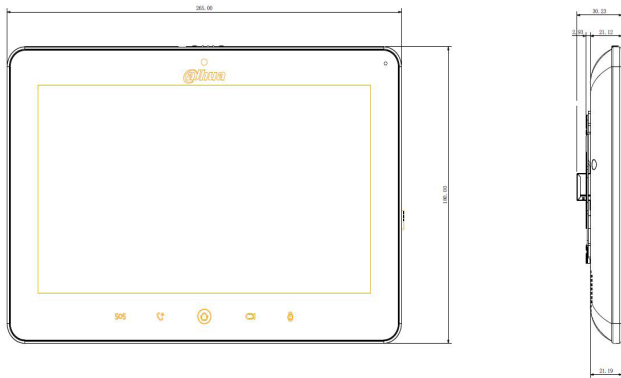

View Area

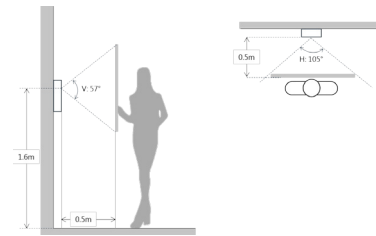

Application

