

VTO6421F

Apartment Outdoor Station



Technical Specification

Model	VTO6421F
-------	----------

System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

Video

Video Compression	H.264
Image Sensor	1/2.9" 2MP CMOS
Auto Gain Control	White Light
Lens	2mm
Angle of View	H: 138.6° V:79.6° D:159°
Day/Night	Color Image

Audio

Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk

Display

Screen	4.3" IPS, 800×480
--------	-------------------

Operation Mode

Keypad	Mechanical Button with Braille
Reader	Mifare Card(13.56MHz)

Approaching Induction

Body Approaching	0.6m
------------------	------

Features

- 4.3" IPS Screen, 800×480
- Supplemental lighting with white light
- 2MP CMOS camera
- Mechanical button with Braille
- Aluminium alloy plate, IK08, IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
- Door release via password and Mifare card



Interface

Alarm In/Out	2/2
Door Control	1 Relay Out 1 RS485 1 Feedback 1 Exit Button
Wiegand	1


Network

Ethernet	10M/100Mbps
Network Protocol	TCP/IP


General

Ingress Protection	IK08, IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
Tamper Switch	1
Installation	Surface & Flush
Material	Aluminum
Power	DC 12V
Power Consumption	Work ≤15W
Working Temperature	-30°C to +60°C
Relative Humidity	20%RH–95%RH
Dimensions	410mm×154mm×51mm
Weight	3kg

Dimensions

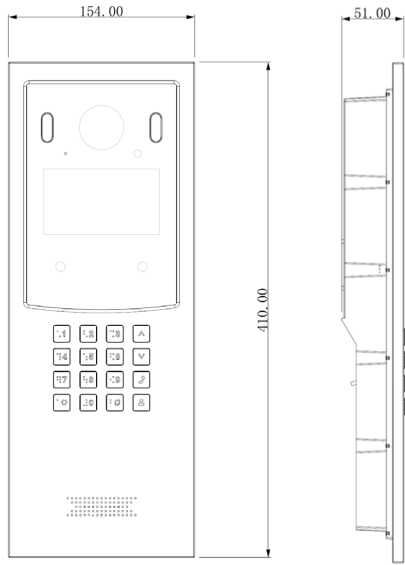

View Area

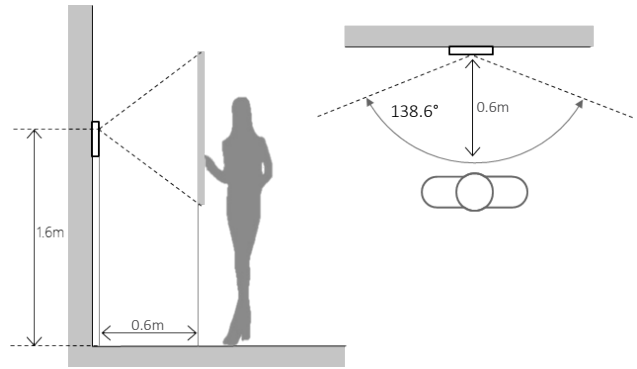

Application

