


# DHI-PHGOA10-SS

Outdoor Fixed LED

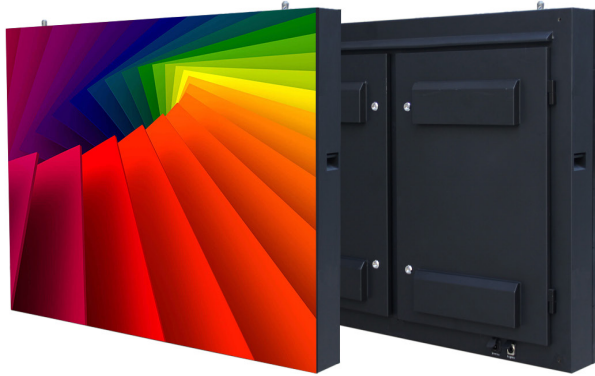

### Features :

- Standardized box: 960x960, standardized module: 320x160
- Standardized, serialized design; save warehousing cost and reduce service cost
- Proprietary redundant design for module
- High protection grade, IP65 on front and IP54 on rear



### Technical Specification

#### Model

Model	DHI-PHGOA10-SS
-------	----------------

#### Parameters

Pixel Pitch	10mm
Pixel Configuration	1R1G1B
LED Type	SMD3535
Brightness	≥5500 cd/m <sup>2</sup>
Viewing Angle	H140°/V100°
Pixel Density	10,000 dot/m <sup>2</sup>
Module Size	320x160 mm
Cabinet Size	960mmx960mmx140mm
Cabinet Weight	43kg
Gray Level	32768
Area	0.9216m <sup>2</sup>
Material	Iron
Aspect Ratio	1:1

Ingress Protection	Front IP65/Rear IP54
Operating Temperature/ Humidity	-20 C~+40 C /10~90%RH
Pixels per Cabinet	96x96 pixels
Processing Depth	14 bits
Brightness Control	Manual/Automatic
Contrast Ratio	4000:1
Frame Rate	50/60 Hz
Refresh Rate	≥1920 Hz
Input Voltage	220V AC
Input Power (max)	1000W/m <sup>2</sup>
Input Power (typical)	400W/m <sup>2</sup>
Installation	Fixed
Maintenance Mode	Rear Maintenance
Data Interconnection	CAT5 Cable ( L≤100m ),single mode fiber ( L≤10km )