


DHI-PHGOA6-SS

Outdoor Fixed LED

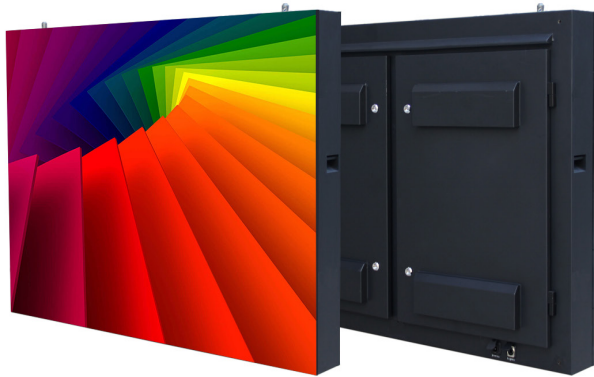

Features :

- Standardized box: 960x960, standardized module: 320x160
- Standardized, serialized design; save warehousing cost and reduce service cost
- Proprietary redundant design for module
- High protection grade, IP65 on front and IP54 on rear



Technical Specification

Model

Model	DHI-PHGOA6-SS
-------	---------------

Parameters

Pixel Pitch	6.67mm
Pixel Configuration	1R1G1B
LED Type	SMD3535
Brightness	≥5500 cd/m ²
Viewing Angle	H140°/V100°
Pixel Density	22,500 dot/m ²
Module Size	320x160 mm
Cabinet Size	960mmx960mmx140mm
Cabinet Weight	43kg
Gray Level	32768
Area	0.9216m ²
Material	Iron
Aspect Ratio	1:1

Ingress Protection	Front IP65/Rear IP54
Operating Temperature/ Humidity	-20 C~+40 C /10~90%RH
Pixels per Cabinet	144x144 pixels
Processing Depth	14 bits
Brightness Control	Manual/Automatic
Contrast Ratio	4000:1
Frame Rate	50/60 Hz
Refresh Rate	≥1920 Hz
Input Voltage	220V AC
Input Power (max)	760W/m ²
Input Power (typical)	310W/m ²
Installation	Fixed
Maintenance Mode	Rear Maintenance
Data Interconnection	CAT5 Cable (L≤100m),single mode fiber (L≤10km)