


# DHI-PHRIA1.95-SH

Indoor Rental LED

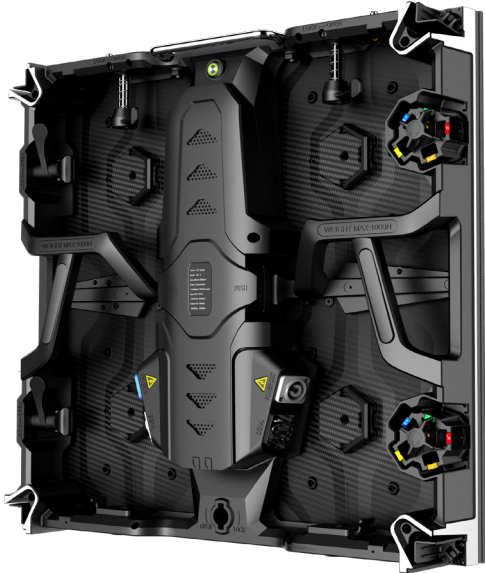

## Features :

- Straight screen, an outer arc and an inner arc, and a total of five angles can be switched to achieve seamless splicing;
- Quick locking, cabinet splicing can be realized within 10s, saving manpower and time;
- The modular design of cabinet, and the modules with any spacing can be interchanged, so that one box can be used for multiple purposes;
- Climbing, hoisting and fixed installation: it can directly climb on the box for maintenance to meet various on-site installation requirements;



## Technical Specification

### Model

Model	DHI-PHRIA1.95-SH
-------	------------------

### Parameters

Pixel Pitch	1.953mm
Pixel Configuration	1R1G1B
LED Type	Mini 4 IN 1
Brightness	800 cd/m <sup>2</sup>
Viewing Angle	H160°; V140°
Pixel Density	262,144 pixels/m <sup>2</sup>
Module Size	250mm×250mm
Cabinet Size	W500m×H500mm×71mm
Weight	8.2 kg/panel
Area	0.25 m <sup>2</sup>
Material	Die-casting Aluminum
Aspect Ratio	1:1
Ingress Protection	IP20/IP20

Operating Temperature/ Humidity	-20 C~+50 C/10~80%RH
Storage Temperature/ Humidity	-25 C~+60 C/10~90%RH
Pixels per Cabinet	256×256 pixels
Brightness Control	Manual/Automatic
Contrast Ratio	8000:1
Processing Depth	12-14 bits
Rate Refresh	3840 Hz
Input Voltage	110~220V AC
Frame Rate	50/60 Hz
Input Power (max)	560 W/m <sup>2</sup>
Input Power (typical)	170 W/m <sup>2</sup>
Lifespan	≥100,000 h
Maintenance Mode	Front/Rear maintenance
Data Interconnection	CAT5 Cable ( L≤100m ); multi-mode fiber ( L≤300m ); single mode fiber (L≤15km)