

# DHI-LM32-B200 32" FHD Monitor



#### Features:

- · Light and cost-effective plastic housing
- $\cdot$  178°H/178°V extra-wide viewing angle for overall viewing performance
- · High fidelity digital processing for a brilliant and vivid video
- $\cdot$  5ms fast response time with no image blurring or ghosting
- $\cdot$  Support multiple signal inputs such as HDMI and VGA
- · Low energy consumption, long service life



#### **Technical Specification**

Model	
Model	DHI-LM32-B200
Display	
Screen Size	31.5"
Aspect Ratio	16:9
Resolution	1920×1080 (FHD)
Backlight	LED
Brightness/Luminance	250 cd/ m²
Contrast	3500:1
Display Color	16.7M(8bit)
Viewing Angle(H/V)	178°(H)/178°(V)
Response time	5ms
Refresh Rate	75Hz
Signals	
Input	VGA×1, HDMI×1
General	
Power Supply	DC12V 4A


Consumption (Standard)	40W		
Consumption (Standby)	≤0.5W		
Net Weight	5.1Kg		
Gross Weight	7.5Kg		
Wall Mount	100×100mm		
Dimension with stand(W×H×D)	714.97*189.2*507.41mm		
Package(W×H×D)	784*142*497mm		
Work Environment	Temperature	0°C~40°C (32°F~104°F)	
work Environment	Humidity	10%~85%	
Accessory			
Standard	HDMI cable, power cable, pedestal		
Optional	Hanging bracket		
Certifications			
Certifications	CE/FCC		

Rev 002.000

© 2022 Dahua. All rights reserved. Design and specifications are subject to change without notice. The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product

## Commercial Series | DHI-LM32-B200

### Dimensions(mm)

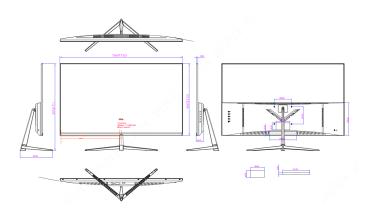

Rev 002.000

© 2022 Dahua. All rights reserved. Design and specifications are subject to change without notice. The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product.