


DHL550UDH-EG

55" FHD Video Wall Display Unit (Ultra Narrow Bezel 1.8mm)

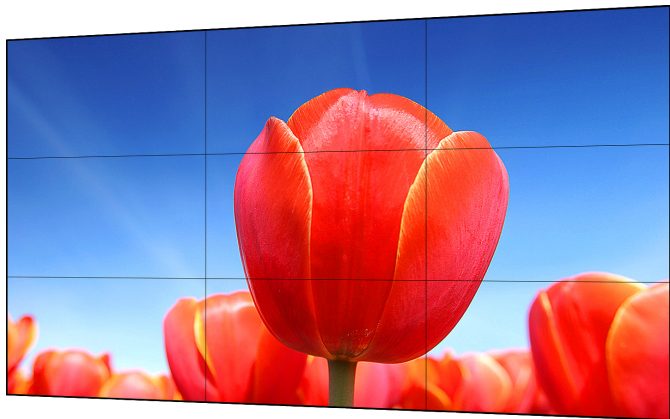

Technical Specification

Model

Model	DHL550UDH-EG
-------	--------------

System

Diagonal	55"(16:9)
LCD Technology	IPS
Resolution	1920×1080 (FHD)
Bezel Width	0.9mm(U/L/R/B)
Backlight	Direct LED
Brightness/Luminance	700 cd/m ²
Contrast Ratio	1400:1
Pixel Density	40dpi
Viewing Angle	H178°, V178°
Response Time	8ms
Display Color	10bit(1.07B)
Color Temperature	10,000K
MTBF	50,000h

Signals

Input	CVBS(BNC)×2, VGA(D-Sub)×1, DVI-D×1, HDMI×1, RS232×1, USB×1, IR×1
Output	CVBS(BNC)×2, RS232×1

Features:



- Industrial level IPS LCD panel, suitable for continuous 24h/7 operation
- Ultra-narrow 1.8mm bezel-to bezel design(0.9mm even panel bezel)
- High contrast ratio and high brightness greatly enhance the video layering, and present the details of the video
- High fidelity digital processing, brilliant and vivid video
- Built-in 3D COMB filter and 3D Noise Reduction
- Abundant interfaces HDMI, DVI, VGA, BNC, USB
- Built-in picture splicing function
- Infrared, RS232 dual mode, supporting remote PC control
- Professional thermal design to extend equipment lifespan
- Built-in power, low energy consumption, ultra-quiet
- Fast stack installation, professional project design, supporting arc-shaped mounting
- Widely used in surveillance center, command center, meeting room, commercial display scenes, etc.



General

Power Supply	AC100V~AC240V, 50/60 Hz	
Power Consumption (Standby)	≤0.5W	
Power Consumption (Typical)	135W	
Power Consumption (Max.)	220W	
Installation Mode	Floor-standing, wall-mounted	
Control Mode	Infrared, RS232 dual mode, supporting remote PC control	
Net Weight	24kg(52.91lb)	
Gross Weight	31kg(68.34lb)	
Dimension (W×H×D)	1211.5mm×682.4mm×117.5mm(47.7"×26.9"×4.6")	
Package (W×H×D)	1360mm×945mm×280mm(53.5"×37.2"×11.0")	
Work Environment	Temperature	0 C~+50 C
	Humidity	10%RH~90%RH

Dimensions(mm)

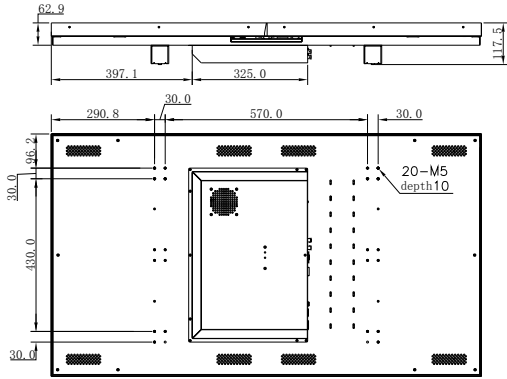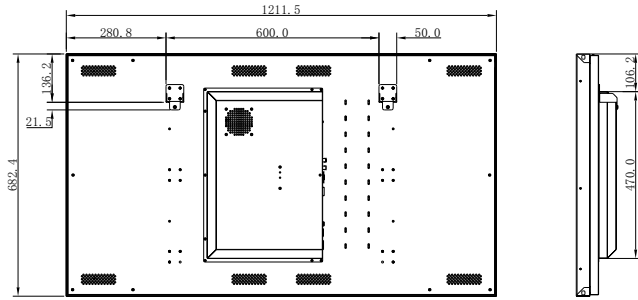

Remove the hook