

DH-HAC-PT1500A-IL-A

5MP Smart Dual Light HDCVI Fixed-focal PT Camera



Series Overview

The Lite Series is a great choice for consumers looking for high quality monitoring products at a reasonable price. Its low cost and high performance make it ideal for residential areas and SMB solutions. This series is equipped with a wide range of technologies, such as full-color and starlight, providing various solutions for different scenarios.

Functions

Smart Area Lighting

Automatically adjusts the intensity of the brightness and exposure for the left and right areas in the video based on the proportion and position of the targets to reveal more details in the image.

Pan & Tilt

Developed with a PT design, it has a dual shaft and dual motor. The motor can control the pan range from 0° to 355° and the tilt range from 0° to 90°, covering all the corners without any dead angles. This extends the monitoring area.

Broadcast-quality Audio

Audio signal transmission over coaxial cables is supported by the HDCVI camera. It adopts a unique audio processing and transmission technology that restores source audio and eliminates noise, ensuring the quality and reliability of the audio information that is collected. This becomes important for video surveillance applications that use audio information as a type of supplementary evidence.

- * The parameters and datasheets below can only be applied to PT1500-IL-52 series.
 * In order to use the 5MP 16:9 and the Smart Dual Light HDCVI camera, the firmware of XVR must be upgraded to V4.001.0000004.1.R.220323 or later version.
- · Max. 25 fps@5MP (16:9 video output).
- · Smart Dual Light.
- · Smart Area Lighting.
- · Pan & Tilt
- · 40 m illumination distance.
- · Super Adapt.
- · Built-in Mic.
- · Quick-to-install structure saves installation time.
- · 3.6 mm fixed lens (2.8 mm optional).
- · IP66, 12 VDC.













Smart Dual Light

With its smart dual light mechanism, the camera automatically turns on the white light when Perimeter Protection/SMD Plus function of AI XVR detects a target in the rule area to capture clear, vivid images. When the target leaves the rule area, the camera automatically switches over from the white light to the IR light to significantly reduce light pollution.

Easy Installation

HDCVI PT camera comes with a quick-to-install design, which makes it easier to install than conventional camera and reduces cost on time and labor.

Super Adapt

With its intelligent algorithm, the camera automatically adjusts its parameters to provide optimal performance and vivid images.

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals (video, audio*, data and power) which are simultaneously transmitted over a coaxial cable. Dual-way data transmission allows the HDCVI camera to interact with the XVR to perform various actions such as sending control signals and triggering alarms. HDCVI technology also supports PoC, which makes the camera easy and quick to install.

* Audio input is available for select HDCVI camera models.

Lite Series | DH-HAC-PT1500A-IL-A

Technical Specification							White Balance	Auto;Area white balance
Camera							Gain Control	Auto;Manual
Image Sensor		5 MP CMOS					Noise Reduction	2D NR
Max. Resolution		2880 (H) × 1620 (V)					Illumination Mode	Smart IR&WL WL Mode; IR Mode
Scanning System		Progressive					Mirror	Yes
Electronic Shutter Speed		PAL: 1/25 s-1/100,000 s; NTSC: 1/30 s-1/100,000 s					Privacy Masking	Off/On (8 areas, rectangle)
Min. Illumination		0.05 lux@F2.0 (Color, 30 IRE)					Certification	
		0.005 lux@F2.0 (B/W, 30 IRE) 0 lux (Illuminator on)					Certifications	CE-LVD: EN 62368-1; CE-EMC: EN 55032; EN 55035
S/N Ratio		>65 dB					Port	
Illumination Distance		IR: 40 m (131.23 ft) Warm light: 40 m (131.23 ft)					Video Output	Video output choices of CVI/TVI/AHD/CVBS by one BNC port
Illuminator On/Off Control		Auto;Manual					Audio Input	One channel built-in Mic
Illuminator Number		4 (Warm light);4 (IR light)					Power	
Angle Adjustment		Pan: 0°–355° Tilt: 0°–90°					Power Supply	12 VDC ± 30% (It is recommended to use a power adapter to supply the power for one camera)
Lens							Power Consumption	Max 6.4 W (12 VDC, IR on)
Lens Type		Fixed-focal					Environment	
Auto Focus		No					Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Lens Mount		M12					Operating Humidity	<95% (RH), non-condensing
Focal Length		2.8 mm; 3.6 mm					Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Max. Aperture		F2.0					Storage Humidity	<95% (RH), non-condensing
Field of View		2.8 mm: H: 112°; V: 58°; D: 134° 3.6 mm: H: 87°; V: 46°; D: 104°					Protection	IP66
Iris Control		Fixed					Anti-corrosion Level	Basic Protection
Close Focus Distance		2.8 mm: 0.9 m (2.95 ft) 3.6 mm: 1.4 m (4.59 ft)					Structure	
DORI Distance	Lens	Detect	Observe	Recognize	Identify		Casing Material	Plastic
		64.0 m	25.6 m	12.8 m	6.4 m		Product Dimensions	92.9 mm × 91.3 mm × 130 mm (3.66" × 3.59" × 5.12")
	2.8 mm	(209.97 ft)	(83.33 ft)	(41.67 ft)	(21.00 ft)		Net Weight	0.39 kg (0.86 lb)
	3.6 mm	79.4 m (260.50 ft)	31.8 m (104.33 ft)	15.9 m (52.17 ft)	7.9 m (25.92 ft)		Gross Weight	0.64 kg (1.41 lb)
Video						Installation	Wall mount; ceiling mount; vertical pole mount	
		CVI: PAL: 5M@25 fps; 5M@12.5 fps; 4M@25 fps; 1080p@25						

NTSC: 5M@25 fps; 5M@10 fps; 4M@30 fps; 1080p@30

5M (2880 × 1620); 4M (2560 × 1440); 1080p (1920 × 1080); 960H (960 × 576/960 × 480)

fps AHD:

TVI:

CVBS: PAL: 960H; NTSC: 960H

Video Frame Rate

Resolution

Day/Night

BLC

WDR

PAL: 4M@25 fps;

NTSC: 4M@30 fps

PAL: 4M@25 fps; NTSC: 4M@30 fps

Auto(ICR)/Color/B/W

BLC; HLC; DWDR


DWDR

Lite Series | DH-HAC-PT1500A-IL-A

Ordering Information							
Туре	Model	Description					
5MP	DH-HAC-PT1500AP-IL-A	5MP Smart Dual Light HDCVI PT Camera, PAL					
Camera	DH-HAC-PT1500AN-IL-A	5MP Smart Dual Light HDCVI PT Camera, NTSC					
	PFA12C	Plastic Junction Box					
Accessories	PFM800-4K	1-CH Passive Video Balun					
(Optional)	PFM321D	12V 1A Power Adapter					
	PFM904	Integrated Mount Tester					

Dimensions (mm[inch])





Accessories

Optional:



PFA12C Plastic Junction Box




PFM800-4K 1-CH Passive Video Balun




PFM321D 12V 1A Power Adapter



PFM904 Integrated Mount Tester

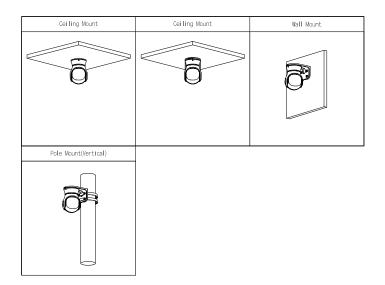



92.9 [3.66]

